



An Oil for Every Season!

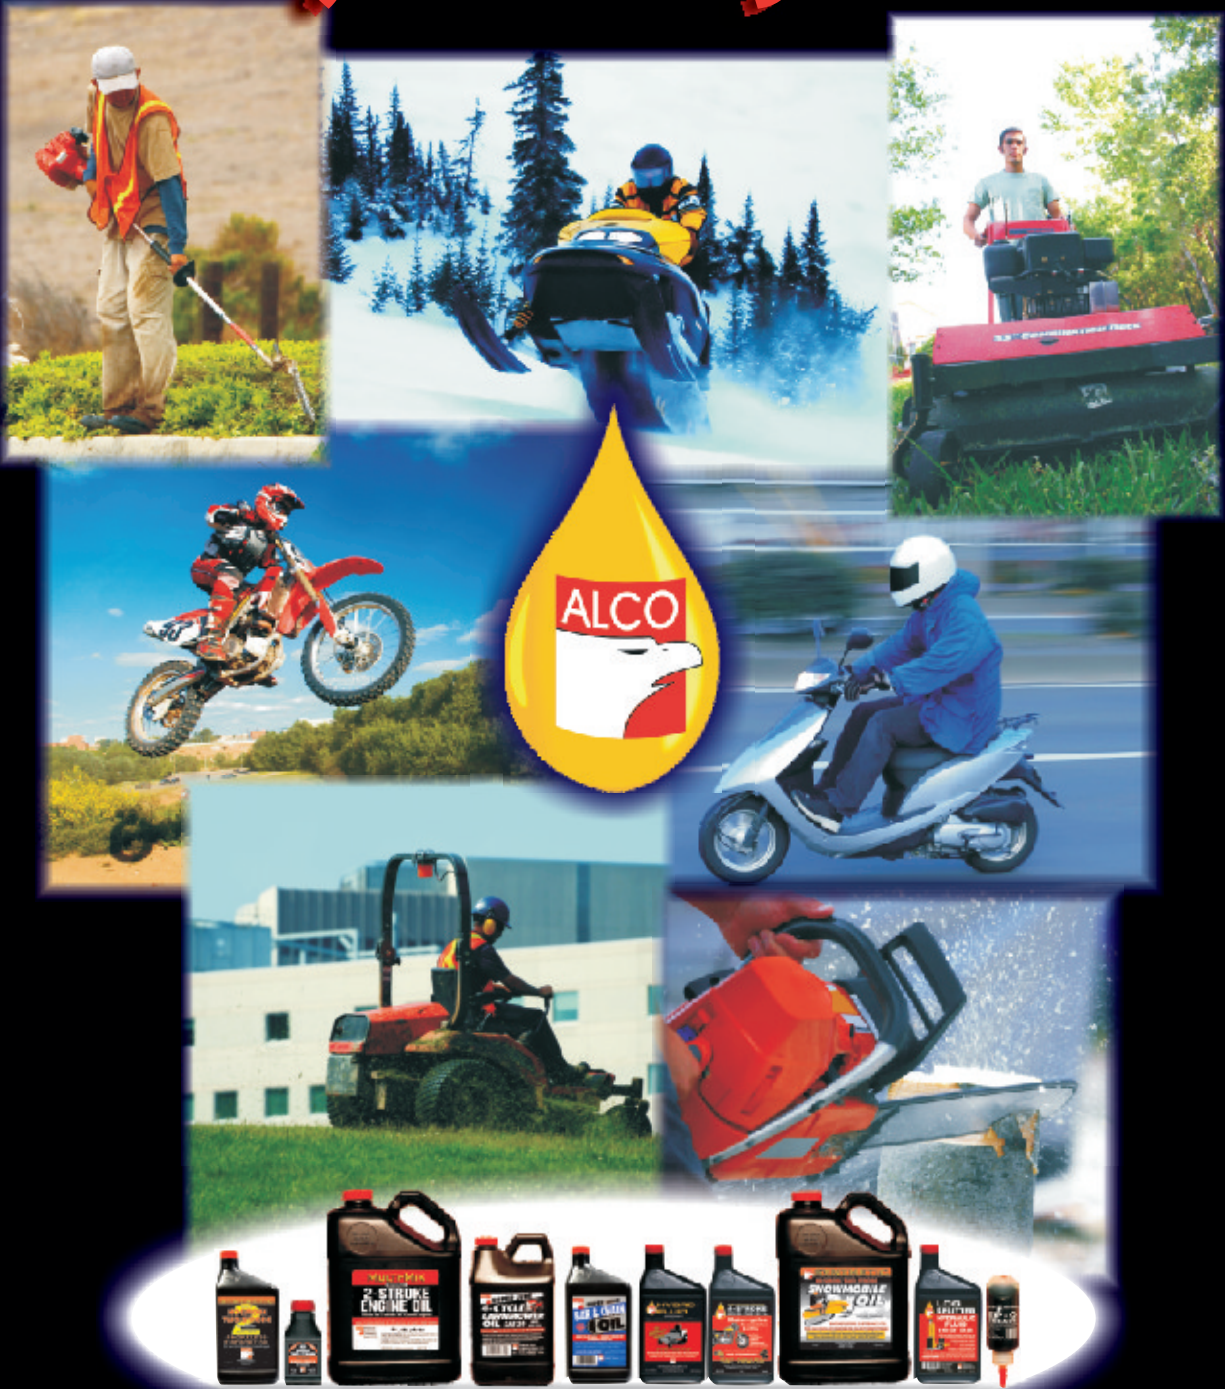

AMERICAN LUBRICATING COMPANY

"Blending Engineering Excellence with Family Pride"



ALCO'S SYNTHETIC NO SMOKE TWO STROKE

With Fuel Stabilizer



4 Litres PART #13425



1 Litre
PART #03425



100 ml
PART #00125


ALCO'S SYNTHETIC NO SMOKE TWO STROKE OIL is a premium synthetic air cooled two stroke oil which represents the newest generation in small engine lubricating technology. It significantly increases performance by virtually eliminating exhaust port blocking. Engine overheating due to blocked exhaust ports is a leading cause of engine failure. By allowing exhaust gasses to escape more readily, the engine is able to exchange more fresh air, producing maximum power. This means that the engine runs at maximum RPMs for much longer periods of time. Other important benefits include reduced exhaust smoke, emissions, particulate matter, air pollutants, muffler gumming, and spark plug fouling. *Passes new Piaggio Hexagon test and OEM approved specification ISO-L-EGD and JASO FD.*

- Superior performance with unleaded gas
- Excellent anti-corrosion performance
- Virtually no carbon build-up
- Incredible anti-seizure protection
- Remarkably less exhaust port clogging
- Significantly less piston scuffing

- Reduced downtime
- Amazingly low deposit formations
- Less Particulate Matter (PM) pollutants
- Safer for the equipment operator
- Increased engine life

ALCO'S SYNTHETIC NO SMOKE TWO STROKE OIL is a multi-ratio formula and is recommended for all air cooled two stroke engines. It meets or exceeds the following OEM and industry tests and specifications: API-TC, ISO-L-EGD, JASO FD, Piaggio Hexagon Detergency PL-077, Husqvarna 242, TISI Specifications.

CONTAINER SIZE:	12/1 Litre case	48/100ml case	4/4 litre case
CASE DIMENSION - CM (LWH):	30 x 28 x 24	37 x 27 x 11	38 x 25 x 28
CASES PER PALLET:	98	192	60
KILOGRAMS PER CASE:	12	5.25	15



ALCO'S SYNTHETIC NO SMOKE TWO STROKE SNOWMOBILE OIL with Fuel Stabilizer


4 Litres
PART #14425

ALCO's SYNTHETIC NO SMOKE TWO STROKE SNOWMOBILE OIL is a premium synthetic two stroke snowmobile oil which represents the newest generation in two stroke engine lubricating technology. It significantly increases performance by virtually eliminating exhaust port blocking. By allowing exhaust gasses to escape more readily, the engine is able to exchange more fresh air, producing maximum power. This allows the engine to run at maximum RPMs for much longer periods of time. Other important benefits include reduced exhaust smoke, particulate matter emission, air pollutants, muffler gumming, and spark plug fouling.

ALCO's SYNTHETIC NO SMOKE TWO STROKE SNOWMOBILE OIL is a multi-ratio formula and is recommended for all two stroke snowmobiles engines with oil injector systems. It meets or exceeds the following OEM and industry tests and specifications: **Rotax-Bombardier 253, JASO-FD, ISO-L-EGD & API-TC.**

DIRECTIONS: Fill oil injector reservoir with ALCO's SYNTHETIC NO SMOKE TWO STROKE SNOWMOBILE OIL

CONTAINER SIZE:	4/4 litre case
CASE DIMENSION - CM (LWH):	38 x 25 x 28
CASES PER PALLET:	60
KILOGRAMS PER CASE:	15

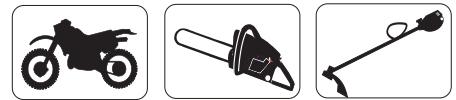

ALCO'S SEMI-SYNTHETIC NO SMOKE TWO STROKE

With Fuel Stabilizer



4 Litres PART #13525



1 Litre
PART #03325





100 ml
PART #00325E

ALCO's NO SMOKE TWO STROKE is a semi-synthetic smokeless two stroke oil specifically blended for chain saws, motorcycles, lawnmowers, string trimmers, blowers, and all other air cooled two cycle engines. NO SMOKE TWO STROKE is safer for the environment and the equipment operator because it eliminates polluting exhaust smoke. When tested against OEM reference oil NO SMOKE TWO STROKE showed:

- Excellent anti-corrosion performance
- Superior performance with unleaded gas
- Virtually no carbon build-up
- Incredible anti-seizure protection
- Remarkably less exhaust port clogging
- Significantly less piston scuffing
- Reduced downtime
- Amazingly low deposit formations
- Less Particulate Matter (PM) pollutants
- Safer for the equipment operator
- Increased engine life
- Meets OEM Approved Global Oil Specification ISO-L-EGD and JASO FD

ALCO's NO SMOKE TWO STROKE meets the severe OEM approved Global air cooled engine oil classification of JASO FD and ISO-L-EGD and is recommended for all air cooled two stroke engines. It is formulated to mix with unleaded gas and is compatible with all oxygenated fuels. NO SMOKE TWO STROKE is a multi-ratio product and gives excellent results in all air cooled two stroke engines. For oil injector systems, fill oil reservoir.

CONTAINER SIZES:	12/1 Litre case	48/100ml case	7/4 litre case
DIMENSIONS-CM (LWH):	30 x 28 x 24	32 x 27 x 11	38 x 25 x 28
CASES PER PALLET:	98	192	60
KILOGRAMS PER CASE:	12	5.25	15



ALCO'S MULTI-MIX UNIVERSAL TWO STROKE OIL



4 Litres PART #11035



1 Litre
PART #11033



100 ml
PART #11009E

MULTI-MIX UNIVERSAL TWO STROKE ENGINE OIL is a superior quality two stroke oil especially designed for high speed air cooled engines in lawn and garden equipment including chain saws, string trimmers, lawnmowers, brush cutters, snowmobiles and motorcycles. Controlled manufacturing procedures, high quality base oils, and a highly concentrated additive package allow one bottle of 100 ml. MULTI-MIX to mix with five litres of gasoline and meet the requirements of all air cooled engines regardless of the specific mixing ratio suggested by the engine manufacturer.



MULTI-MIX meets API air cooled oil specification TC-3 and incorporates the following good properties:

- **Sta-Mixed Additives - Ensures lubrication even after prolonged storage.**
- **Quality Base Oils - For maximum lubrication with minimum carbon build-up.**
- **Colored Oil - See at a glance that oil has been added to your gas.**
- **Alcohol Compatible - Outstanding performance with all oxygenated fuels.**

MULTI-MIX is packaged in a consumer-oriented compact plastic bottle which:

- **Maximizes shelf space**
- **Minimizes container waste**
- **Reduces transportation cost**
- **Permits blister packaging possibilities**
- **Allows for flexible private labeling potential**

CONTAINER SIZE:	12/1 Litre case	48/100ml case	4/4 litre case
CASE DIMENSION - CM (LWH):	30 x 28 x 24	32 x 27 x 11	38 x 25 x 28
CASES PER PALLET:	98	192	60
KILOGRAMS PER CASE:	12	5.25	15



ALCO'S SUPER-LUBE 4-CYCLE LAWNMOWER OIL



4 Litres
PART #02035



1.4 Litres
PART #04830




1 Litre
PART #03330



600 ml
PART #02030

SUPER-LUBE 4-CYCLE LAWNMOWER OIL is a High Detergent SAE 30 API SG/CD motor oil especially designed for small air cooled 4-cycle engines. This includes many lawnmowers, generators, garden tractors, tillers, and other 4-cycle engines. SUPER-LUBE 4-CYCLE LAWNMOWER OIL meets the warranty requirements of Briggs & Stratton, Tecumseh, and other engine manufacturers. NOTE: This oil is not designed to mix with fuel. Always follow equipment manufacturers' recommendations.

CONTAINER SIZES:	3/4 litre case	6/1.4 Litre case	12/1 Litre case	12/600ml case
DIMENSIONS-CM (LWH):	38 x 25 x 28	25 x 24 x 22	30 x 28 x 24	25 x 23 x 23
CASES PER PALLET	60	120	98	150
KILOGRAMS PER CASE:	15	9	12	8



ALCO'S SUPER-LUBE BAR & CHAIN OIL



3.75 Litres
PART #10003





1 Litre
PART #10033

SUPER-LUBE BAR & CHAIN OIL is a special blend of virgin oils, tackiness agents, Anti-Wear additives, and Rust & Oxidation inhibitors. This premium product has low sulfur content and is generally regarded as "The Best Oil on the Market."

NOTE: SUPER-LUBE BAR & CHAIN OIL is for use in chain reservoirs for chain saws and not for crankcase use.

CONTAINER SIZES:	6/3.75 Litre case	12/1 Litre case
DIMENSIONS-CM (LWH):	48 x 33 x 28	30 x 28 x 24
CASES PER PALLET:	42	98
KILOGRAMS PER CASE:	24	12

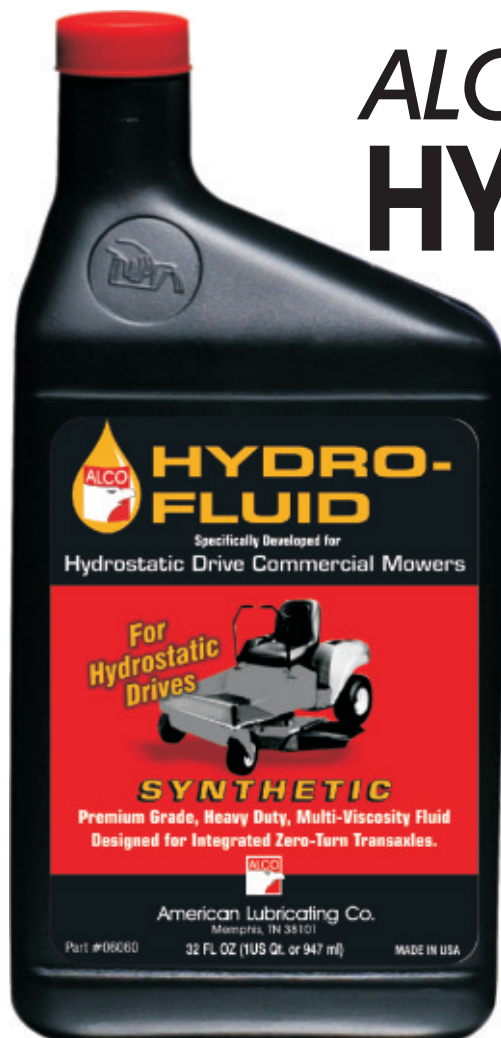

ALCO'S SYNTHETIC HYDRO-FLUID

*Specifically Developed
for Hydrostatic Drive
Commercial Mowers*

1 Quart
PART #06060


ALCO'S HYDRO-FLUID is a full synthetic premium multi-viscosity fluid designed for Integrated Zero-Turn Trans axles in heavy-duty commercial applications.

ALCO's Hydro-Fluid is an all weather lubricant containing excellent cold weather flow properties, providing outstanding heat resistance with anti-wear and rust and oxidation protection.

ALCO's Hydro-Fluid also provides:

- **Superb shift quality in hydrostatic transmissions**
- **High stability under thermal or oxidative stress**
- **Reduced clutch and wet brake chatter**
- **Ease in bidirectional output rotation**

CONTAINER SIZES:	6/1 Quart case
DIMENSIONS-CM (LWH):	15 x 28 x 24
CASES PER PALLET:	196
KILOGRAMS PER CASE:	6



ALCO's PREMIUM MOTORCYCLE 4-STROKE ENGINE OIL



1 Litre 20W-50
PART #20W50L

Motorcycles place tough demands on motor oils—demands that automotive oils are not designed to handle. **ALCO 4-Stroke Engine Oil** helps you get the best performance from your motorcycle.



1 Litre 10W-40
PART #10W40L


ALCO's 4-Stroke Engine Oil is designed for use in 4-Stroke: Motorcycles, Utility Vehicles, Snowmobiles and ATVs.

ALCO's 4-Stroke Motorcycle Engine Oil ensures trouble-free engine, transmission and clutch performance. Its advanced additive technology provides these benefits:

- **Thermally stable formula helps maintain proper lubrication and protects engines under high RPM in the most severe operating conditions and extreme temperatures.**
- **Optimal frictional characteristics designed for integrated engine/transmissions provide smooth shifting, maximum power transfer and protection of the wet clutch.**
- **Provides excellent wear and oxidation protection, good startability, seal compatibility, high temperature endurance and reliability and is fortified with anti-varnish and anti-sludge additives.**

ALCO's 4-Stroke Motorcycle Engine Oil meets or exceeds the warranty requirements of and is compatible with OEM oils. It meets numerous OEM and industry specifications such as API SE, SF, SG and JASO MA T903 (Wet Clutch Performance) and T904 (Clutch Slippage)

CONTAINER SIZE:	12/1 Litre case
CASE DIMENSION - CM (LWH):	30 x 28 x 24
CASES PER PALLET:	98
KILOGRAMS PER CASE:	12



ALCO'S LOG SPLITTER HYDRAULIC FLUID ISO 32



ALCO's Log Splitter Hydraulic Fluid is for use in gas and electric hydraulic log splitters.

ALCO's Log Splitter Hydraulic Fluid also provides:


- **Protection for pumps and cylinders.**
- **Low pour point for use in cold weather.**
- **Anti-wear properties and anti-rust and oxidation inhibitors.**
- **For use wherever an ISO 32 grade hydraulic fluid is recommended.**

1 Litre
PART #04033

CONTAINER SIZE:	12/1 Litre case
CASE DIMENSION - CM (LWH):	30 x 28 x 24
CASES PER PALLET:	98
KILOGRAMS PER CASE:	12



ALCO'S SUPER-LUBE EP-O GREASE

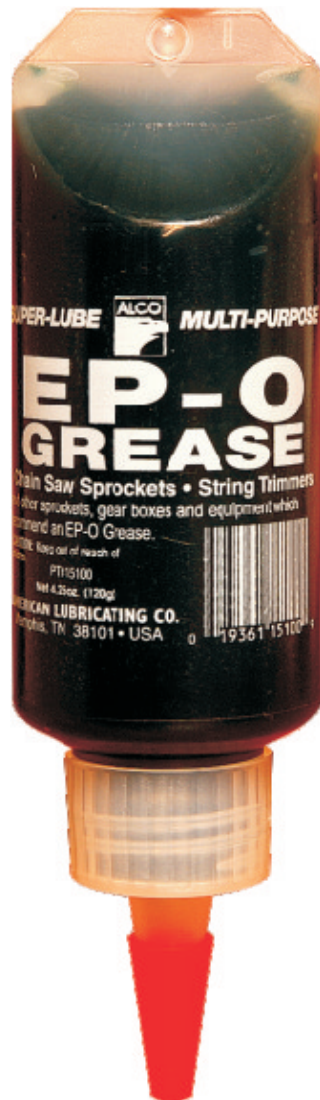

120g
PART #15100

SUPER-LUBE EP-O GREASE is a high quality lithium grease containing conventional non-lead Anti-Wear (AW) and Extreme Pressure (EP) additives and a highly refined mineral base oil. This premium product has very good shear stability and gives excellent rust and oxidation protection over a wide range of operating conditions. It is recommended for chain saw sprockets, string trimmer shafts and other sprockets, gear boxes and equipment which recommend an EP-O Grease.

CONTAINER SIZES:	12/120g case
CASE DIMENSIONS-CM (LWH):	22 X 16 X 19
CASES PER PALLET:	217
KILOGRAMS PER CASE:	2.25